

Classic LED 3000K

A old favourite in our assortment. Classic has a ceramic base and a shiny opal shade. It can be placed in the ceiling or on the wall, both indoors and outdoors. Equipped with a LED module, 13W.


EAN / GTIN	7312904091828
E-number	7501371
Article no.	4091-800-12
Type designation	8262/LED



Specification

Base colourGrey (NCS \$ 6005-G50Y)GlassShiny opal glassGlass thread (mm)185,5 mmGlass gasketSiliconeWeight2,42 kgDiameter (mm)240Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350ImLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassicDesignIfö Electric	Material	Porcelain
Glass thread (mm)185,5 mmGlass gasketSiliconeWeight2,42 kgDiameter (mm)240Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, light source3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Base colour	Grey (NCS \$ 6005-G50Y)
Glass gasketSiliconeWeight2,42 kgDiameter (mm)240Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Glass	Shiny opal glass
Weight2,42 kgDiameter (mm)240Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Glass thread (mm)	185,5 mm
Diameter (mm)240Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Glass gasket	Silicone
Height (mm)117Lamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Weight	2,42 kg
Lamp holderLEDLamp holderLEDLight sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Diameter (mm)	240
Light sourceLED module, 12W **Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable glandsBottom inletCable glandsBottom inletCable glandsYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Height (mm)	117
Effect12WLumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Lamp holder	LED
Lumen, light source1350lmLumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Light source	LED module, 12W **
Lumen, luminarire1033Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Effect	12W
Colour temperature3000KMacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Lumen, light source	1350lm
MacAdam3 SDCMLife spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Lumen, luminarire	1033
Life spanL80/B10: 47 000 hRaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Colour temperature	3000K
RaMin 90Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	MacAdam	3 SDCM
Rated voltage230VDimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Life span	L80/B10: 47 000 h
DimmableRC modeIP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Ra	Min 90
IP classIP44Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Rated voltage	230V
Insulation classIIEnergy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Dimmable	RC mode
Energy classED classNoIK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	IP class	IP44
IntegrationImage: Constraint of the second seco	Insulation class	11
IK classIK02Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Energy class	E
Ta-30 - +25InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	D class	No
InstallationCeiling/wallCC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	IK class	IK02
CC measurement (mm)133, 70Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Та	-30 - +25
Knock out opening3Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Installation	Ceiling/wall
Cable inletBottom inletCable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	CC measurement (mm)	133, 70
Cable glandsBottom inletCable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Knock out opening	3
Cable area, maxMax 3 x 2,5 mm2BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Cable inlet	Bottom inlet
BridgingYesSurface mounted cableYesConnectionTerminal blockFamilyClassic	Cable glands	Bottom inlet
Surface mounted cable Yes Connection Terminal block Family Classic	Cable area, max	Max 3 x 2,5 mm2
Connection Terminal block Family Classic	Bridging	Yes
Family Classic	Surface mounted cable	Yes
	Connection	Terminal block
Design Ifö Electric	Family	Classic
	Design	Ifö Electric



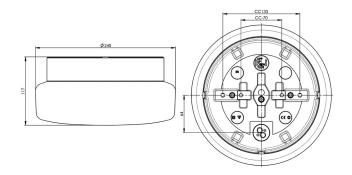

Maintenance

Disconnect the power to the luminaire. Unscrew the glass and clean it. Do not use detergents that contain solvents. Replace LED module if necessary. Check the gasket and replace it if necessary. Screw the shade back on.

Spare parts

Shade Classic shiny opal, Article no.: 1-6115 Gasket silicone for thread 185,5 mm, Article no.: 03431 LED module 12W 3000K IOT, Article no.: 1-54064-930

** The device must under no circumstances be connected to the same phase as a magnetic ballast or other older fluorescent luminaires as these luminaires can generate overvoltage transients outside of EU regulatory standards when switched off or on. The luminaire can permanently damage or completely cease to function when connected.

If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).