


Suspended tubular light

Description



- Suspended tubular light VENDOME 133 6L (design: Normal Studio)
- Honeycomb perforation grid
- Grid with BRASS finishing
- Housing: Co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: 316L stainless steel brass finishing sensitive to scratches, handle with care
- Anodised aluminium reflector : BRASS
- Brass anodised aluminium grid inserted inside the housing
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Stainless steel gear tray with 6 porcelaine sockets E27
- Gaskets: Gaskets moulded in EPDM

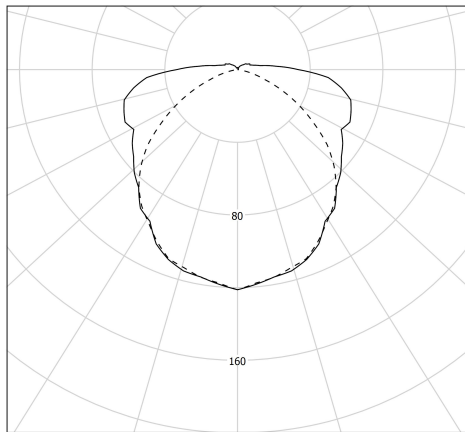


cd/klm
— C0 - C180 - - - C90 - C270 $\eta = 42\%$

Light specifications and controlling

- With 6 clear LED E27 filament lamps (4W 2700K)
- non dimmable

Installation and maintenance

- Diameter: 133 mm
- Total length: 1295 mm
- Provided with 3m 3G1,5 cable with tinned copper meshwork under transparent tubing
- Connection to 3x2.5mm² automatic terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of Ø1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing



Characteristics

- Warranty : 5 years
- Operating temperature: -20 °C to +35 °C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- T°C with incandescent wires: 650°C
- Weight: 5 kg
- Designed and made in France