

Solenne 320/173 LED DALI 3000K

Solenne is designed by Kauppi & Kauppi and includes a total of seven lighting fixtures, all with generous matt opal glass shades and black or white glazed porcelain bases. Four of the fixtures follow our traditional range for ceiling, wall, and facade with IP44 ratings suitable for both indoor and outdoor installations. The collection also includes three more novel types of lighting fixtures, taking our pressed porcelain to new indoor contexts. Solenne includes a grand pendant with a corresponding porcelain ceiling cup, a new table luminaire with a wooden base, and Ifö Electric's very first floor lamp.

EAN / GTIN	7312908442954
E-number	7509653
Article no.	8442-8001-16
Type designation	8262/DALI






Specification

Glass Hread (mm) Glass gasket Silicone Diameter (mm) S20 Height (mm) Lamp holder Light source Light source Colour temperature S3000K MacAdam S3DCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage Z30V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class IK class IK class IK class IK coz Ta -30 - +25 Installation CC measurement (mm) CC measurement (mm) T33, 70 Knock out opening Surface mounted cable Family Solenne Cauppi & Kauppi Kauppi & Kauppi Kauppi Kauppi & Kauppi Kaupp	Base colour	Black (NCS S 9000-N)
Glass gasket Diameter (mm) 320 Height (mm) 173 Lamp holder LED Light source LED module, 12W ** Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK class IK02 Ta -30 - +25 Installation CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Cable glands Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Glass	Matt opalglas
Diameter (mm) Height (mm) Lamp holder LED Light source LED module, 12W ** Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP class IP class II Energy class E D class No IK class IK class IK02 Ta -30 - +25 Installation CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Cable glands Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Glass thread (mm)	185,5 mm
Height (mm) Lamp holder Light source Light source LED module, 12W ** Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP class IP 44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Cable glands Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Glass gasket	Silicone
Lamp holder Light source Light source LED module, 12W ** Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP 44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Diameter (mm)	320
Light source Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation CC measurement (mm) CC measurement (mm) Ta3, 70 Knock out opening Cable inlet Bottom inlet Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Height (mm)	173
Colour temperature 3000K MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Lamp holder	LED
MacAdam 3 SDCM Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Light source	LED module, 12W **
Life span L80/B10: 47 000 h Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Colour temperature	3000K
Ra Min 90 Lighting control LED module, 12W ** Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	MacAdam	3 SDCM
Lighting control Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation CC measurement (mm) Tander of the state of	Life span	L80/B10: 47 000 h
Rated voltage 230V Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Ra	Min 90
Dimmable DALI PHM126 min 3% IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Lighting control	LED module, 12W **
IP class IP44 Insulation class II Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Rated voltage	230V
Insulation class Energy class E D class No IK class IK02 Ta	Dimmable	DALI PHM126 min 3%
Energy class E D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	IP class	IP44
D class No IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Insulation class	II
IK class IK02 Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Energy class	E
Ta -30 - +25 Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	D class	No
Installation Ceiling/wall CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	IK class	IK02
CC measurement (mm) 133, 70 Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Ta	-30 - +25
Knock out opening 3 Cable inlet Bottom inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Installation	Ceiling/wall
Cable inlet Cable glands Bottom inlet Bridging Yes Surface mounted cable Connection Terminal block Family Bottom inlet Tess Terminal block Solenne	CC measurement (mm)	133, 70
Cable glands Bridging Yes Surface mounted cable Connection Terminal block Family Solenne	Knock out opening	3
Bridging Yes Surface mounted cable Yes Connection Terminal block Family Solenne	Cable inlet	Bottom inlet
Surface mounted cable Yes Connection Terminal block Family Solenne	Cable glands	Bottom inlet
Connection Terminal block Family Solenne	Bridging	Yes
Family Solenne	Surface mounted cable	Yes
	Connection	Terminal block
Design Kauppi & Kauppi	Family	Solenne
<u> </u>	Design	Каиррі & Каиррі



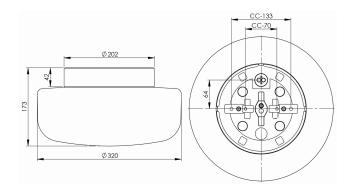

Maintenance

Disconnect the luminiarie. Remove the shade and clean it. Do not use cleaning agents containing solvents. Change the light source if necessary. Check the gasket and change it if necessary. Replace the shade.

Spare parts

Shade Solenne 320, Article no.: 1-6165-30 Gasket silicone for thread 185,5 mm, Article no.: 03431 LED module 12W DALI 3000K, Article no.: 1-54064-1930

** The device must under no circumstances be connected to the same phase as a magnetic ballast or other older fluorescent luminaires as these luminaires can generate overvoltage transients outside of EU regulatory standards when switched off or on. The luminaire can permanently damage or completely cease to function when connected.

If the luminaire is modified the person responsible for the modification shall be considered manufacturer. Subject to errors in text. We reserve the right to change the technical specifications (without notice).