











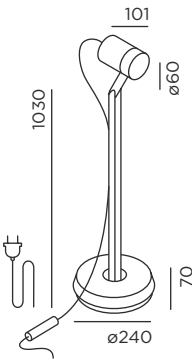



**piek lettura + piek lettura controller** Design: Sebastian David Büscher



**piek lettura + piek lettura controller** Design: Sebastian David Büscher

<p><b>Lichttechnik:</b> 230V Power LED 2700K L70/50.000 h</p> <p><b>Reflektor: Flood</b></p> <p><b>dimmbar</b></p> <p><b>Anschluss:</b> 5 m Zuleitung (H05RN8-F 3G0,75 mm<sup>2</sup>) inkl. Schutzkontaktstecker anschlussfertig</p> <p><b>[piek lettura controller: inkl. Controller]</b></p> <p><b>ortsveränderlich</b></p>	<p><b>Material:</b> Kopf: Aluminiumguss pulverbeschichtet Stab: Edelstahl pulverbeschichtet Fuß: Eisenguss pulverbeschichtet Klarglas</p> <p><b>Schutzart:</b> IP65</p>  <p><b>Lichtrichtung:</b></p> 	<p><b>light technology:</b> 230V Power LED 2700K L70/50.000 h</p> <p><b>reflector: flood</b></p> <p><b>dimmable</b></p> <p><b>connection:</b> 5 m supply cable (H05RN8-F 3G0,75 mm<sup>2</sup>) incl. safety plug ready to connect</p> <p><b>[piek lettura controller: incl. controller]</b></p> <p><b>movable</b></p>	<p><b>material:</b> head: aluminium die-casting powder-coated pole: stainless steel powder-coated base: iron casting powder-coated clear glass</p> <p><b>protection class:</b> IP65</p>  <p><b>light direction:</b></p> 
--	--	--	--

piek lettura	Farbe colour	Art.-Nr. item no.	Systemleistung system performance
	 anthracite RAL 7016	92075-27-AN	6 W/220 lm
	 cool brown	92075-27-CB	6 W/220 lm
	 deep black RAL 9005	92075-27-BL	6 W/220 lm

	 anthracite RAL 7016	92075-27-AN-CONT	6 W/220 lm
	 cool brown	92075-27-CB-CONT	6 W/220 lm
	 deep black RAL 9005	92075-27-BL-CONT	6 W/220 lm

Größe in mm  
size in mm

+ **Optional mit piek cover.**  
with piek cover as an option

+ **Optional mit CH-Stecker . Art.-Nr. + Preise in separater Preisliste + www.IP44.de**  
with CH-plug as an option . item no. + prices in separate price list + www.IP44.de

+ **Anschluss optional mit IP44.DE connect.**  
connection with IP44.DE connect as an option.